

## Technical Data

# LAM-125 LAM-226

## LAMINATING EPOXY

### COMBINED FEATURES

**Low viscosity** for quick wet out of synthetic composite fabrics; especially effective with Kevlar® and carbon fiber.

**Medium cure speed** hardener provides 2 to 3 hours of working time at 77°F (25°C). A typical laminate will be gelled in 4 to 5 hours.

**Optimized** for hand wet out and machine impregnation in contact molding, vacuum bagging and Light RTM applications.

**Room temperature cure** properties suitable for many composite components and structures.

**T<sub>g</sub> as high as 207°F (97°C)** with proper post cure providing excellent temperature stability and great part cosmetics.

**Cost effective, high performance** epoxy formulation for synthetic composite manufacturing.

**Quality-control tinting** is available at no extra charge; simply add "QC" after the product code on your order.

**Shelf life** is 3 years for resin and 2 years for hardener when properly stored<sup>3</sup>.

The New  
Standard

EPOXIES for  
Laminating  
Infusion  
Tooling  
Assembly

Gougeon Brothers, Inc.  
P.O. Box 908  
Bay City, MI 48707  
prosetepoxy.com  
888-377-6738

ISO9001:2015 Certified

Rev 3 / Dec 2015

### HANDLING PROPERTIES

Property	Standard	Units	72°F (22°C)	77°F (25°C)	85°F (29°C)
150g Pot Life	ASTM D2471	minutes	71-87	56-70	36-46
500g Pot Life	ASTM D2471	minutes	50-62	46-58	32-40
Viscosity Mixed	ASTM D2196	cP	696	544	402
Viscosity (resin)	ASTM D2196	cP	1,731		
Viscosity (hardener)	ASTM D2196	cP	42		


### MIX RATIO

Method	Resin:Hardener	Resin:Hardener
Weight	3.5:1	100:28.1
Weight Range	3.76:1–3.23:1	100:26.6–100:30.9
Volume	3.00:1	100:33.3
Volume Range	3.16:1–2.72:1	100:31.6–100:36.7

### DENSITY

State	Units	72°F (22°C)
Cured	lb/gal (g/cc)	9.59 (1.15)
Resin	lb/gal (g/cc)	9.58 (1.15)
Hardener	lb/gal (g/cc)	8.06 (0.97)

### VISCOSITY VS TEMPERATURE

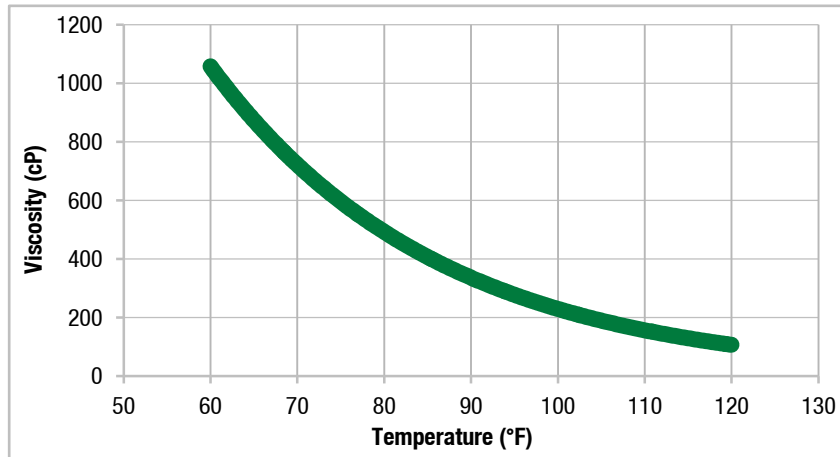

Test specimens were neat epoxy (without fiber reinforcement).  
Typical values, not to be construed as specification.

# LAM-125~LAM-226

## LAMINATING EPOXY

### MECHANICAL PROPERTIES

Property	Standard	Units	72°F (22°C) x 4 wk	77°F (25°C) x 2 wk	RT Gelation + 120°F (49°C) x 8 hrs	RT Gelation + 140°F (60°C) x 8 hrs	RT Gelation + 180°F (82°C) x 8 hrs
Hardness	ASTM D2240	Type D	92	92	92	93	93
Compression Yield	ASTM D695	psi (MPa)	16,700 (115)	16,800 (116)	14,400 (99)	14,400 (99)	14,400 (99)
Tensile Strength	ASTM D638	psi (MPa)	9,570 (66)	8,100 (56)	10,600 (73)	10,600 (73)	10,600 (73)
Tensile Modulus	ASTM D638	psi (GPa)	5.34E+05 (3.68)	5.64E+05 (3.89)	4.91E+05 (3.39)	4.96E+05 (3.42)	4.33E+05 (2.99)
Tensile Elongation	ASTM D638	%	2.1	1.7	3.8	5.6	7.2
Flexural Strength	ASTM D790	psi (MPa)	17,100 (118)	15,300 (105)	18,800 (130)	18,800 (130)	18,800 (130)
Flexural Modulus	ASTM D790	psi (GPa)	5.36E+05 (3.7)	5.86E+05 (4.04)	5.39E+05 (3.72)	5.08E+05 (3.5)	4.37E+05 (3.01)

### THERMAL PROPERTIES

Property	Standard	Units	72°F (22°C) x 4 wk	77°F (25°C) x 2 wk	RT Gelation + 120°F (49°C) x 8 hrs	RT Gelation + 140°F (60°C) x 8 hrs	RT Gelation + 180°F (82°C) x 8 hrs
Tg DMA Peak Tan Delta	ASTM E1640 <sup>1</sup>	°F (°C)	160 (71)	161 (72)	189 (87)	202 (94)	226 (108)
Tg DMA Onset Storage Modulus	ASTM E1640 <sup>1</sup>	°F (°C)	146 (63)	148 (64)	169 (76)	182 (83)	207 (97)
Tg DSC Onset– 1st Heat	ASTM E1356	°F (°C)	135 (57)	138 (59)	153 (67)	162 (72)	191 (88)
Heat Deflection Temperature	ASTM D648	°F (°C)	130 (54)	131 (55)	150 (66)	165 (74)	182 (83)
Tg DSC Ultimate	ASTM E1356	°F (°C)			190 (88) <sup>2</sup>		

<sup>1</sup> 1 Hz, 3°C per minute.

<sup>2</sup> Additional post cure may be required; contact Technical Department for details.

<sup>3</sup> Store PRO-SET® Epoxy resins and hardeners at room temperature in sealed containers until shortly before use. As with many high-performance epoxy resins, repeated exposure to low temperatures during storage may cause the resin to crystallize. If this occurs, warm the resin to 125° F and stir to dissolve crystals. Hardeners may form carbamation when exposed to CO<sub>2</sub> and moisture in the atmosphere for extended periods of time. Prevent carbamation by protecting hardeners from exposure until immediately prior to processing.

Rev 3 / Dec 2015